


HOME

Products

▼ Sound / Noise Control

- RSIC-1®
- RSIC-1 Backer®
- RSIC-1-Edge®
- RSIC-1-Low Profile®
- RSIC-1 RETRO®
- RSIC-1-ADM® Shoot In
- RSIC-1-ADM® Mini Drop In
- RSIC-1-ADM® Wood
- RSIC-1-ADM® Side Mount
- RSIC-1.5CRC®
- RSIC Multi Clip
- RSIC-1 TTC®
- RSIC-1 EXT04®
- RSIC-1 Head of Wall®
- RSIM®
- RC-1 Boost®
- RSIC-SI-WHI®
- RSIC-SI Pro Series®
- RSIC-SI-CRC Pro Series®
- RSIC-SI-CRCX2-LP®
- Available Now
- RSIC-SI-1 Ultra Spring Isolator®
- RSIC-SI-DC04® Pro Series
- RSIC-WHI®
- RSIC-FCR-HD
- RSIC-V®
- RSIC-DC04®
- RSIC-DC04HD®
- RSIC-DC04X2®
- RSIC-DC04X2HD®
- RSIC-U®
- RSIC-U-HD®
- RSIC-Joist Isolator®
- RSIC-WFI®
- RSIC-FGP®
- RSIC-2® (RSIC-1® with 3/8" spacer)
- RSIC-2 RETRO®
- RSIC-CWB®

Resilient Sound Isolation Clip (RSIC-SI-1®) Ultra  
(Spring Isolator) NEW PRODUCT!

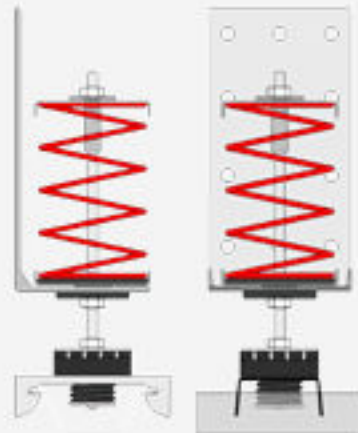

RSIC-SI-1 Ultra Spring Isolator®

The **RSIC SI-1 Ultra** is designed for use with any wood framed, steel framed, or concrete (with Over Head Adapter) ceiling system where noise control is needed. The RSIC-1 assembly decouples and isolates the gypsum board or plywood from the structure increasing the acoustical performance of the system. With an Acoustical design load range from 5 lbs to 40 lbs per isolator, the RSIC-SI-1 Ultra clip can support up to two layers of 5/8" gypsum board when spaced at 24" x 48" oc. For heavier systems increase the number of isolators to support the additional weight of the system. The RSIC-SI-1 Ultra clip fastens directly to the framing or structure creating an air cavity between the face of the framing and the back of the gypsum board. The RSIC-SI-1 Ultra stops the noise and vibrations that typically would be allowed to transfer through the structure.

Click here for RSIC-SI-1 Install Guide



- [RSIC-SI-1 Drawing](#)
- [RSIC-SI-1 Ultra flier](#)
- [RSIC-SI-1 Templates](#)
- [RSIC-SI-1 Install Guide](#)

Wood
Steel
Metal deck

Concrete
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

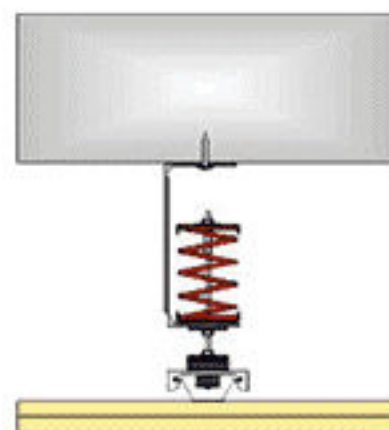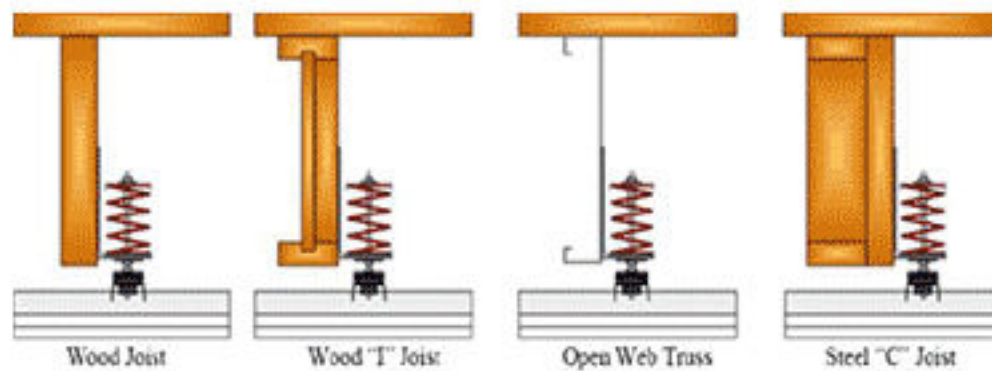

RSIC-SI-1 Ultra specifications:

Change to 1"

Made in the USA	YES
Acoustical design load:	5 lb to 40 lb
Total deflection	1/2"
Double deflection	YES
Made with Recycled content	YES
Cryo low VOC treated	YES
Adjustable	YES
Cavity min	1/2"
Cavity Max	4"
Adjustment limit	1"
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Retro Fit	NO

Change to 1/2"