

RSIC-1.5 CRC ACOUSTIC ASSEMBLY PA

FLOOR/CEILING ASSEMBLY

DROPPED CEILING UNDER CONCRETE

FCS RSIC1.5CRC Dropped Ceiling

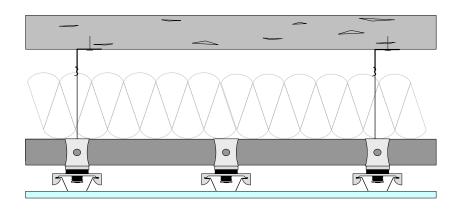

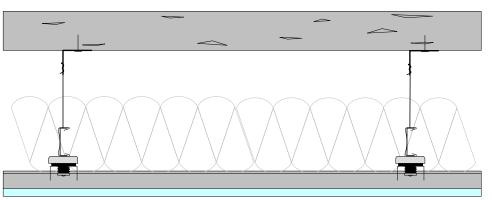

CONSTRUCTION

8" pt Slab no finish

1.5" CRC Channel spaced at 48" oc.

6" Glass fiber insulation

RSIC-1.5CRC snapped on to 1.5" CRC @ 24" oc

1 layer 5/8" gypsum board

