PAC INTERNATIONAL, INC.

1 Hour Fire Rated Steel Wall Detail - UL U493

(See UL.com for additional detail)

STC EST. 60

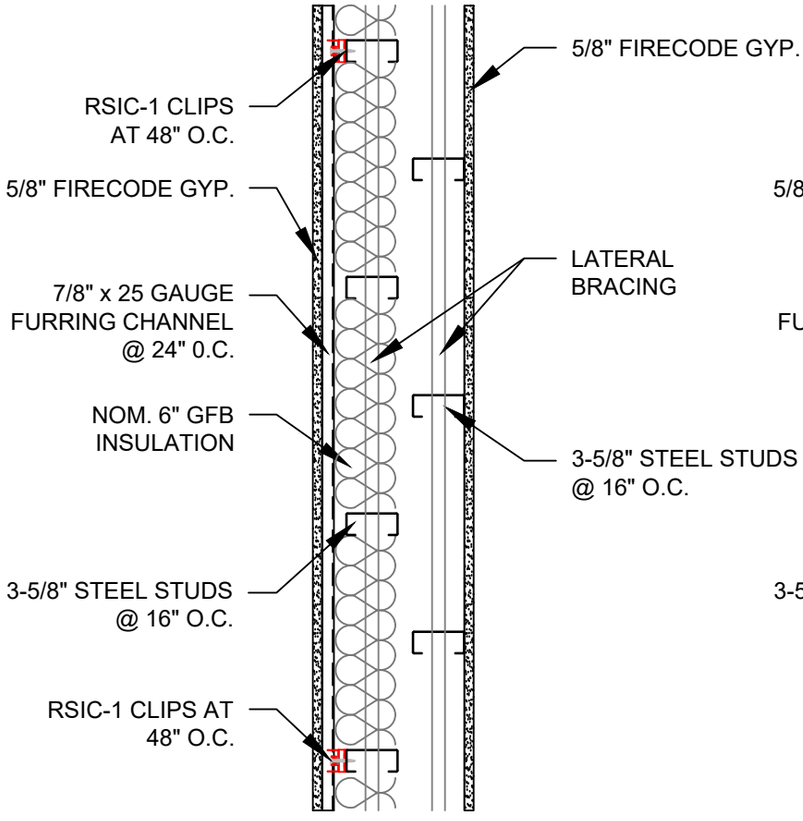

CONSTRUCTION

- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 16" 0.C.
- RSIC-1 CLIPS @ 24" x 48" oc
- NOM. 6" GFB INSULATION
- 3-5/8" STEEL STUDS @ 16" oc W/ LATERAL BRACING
- 1" GAP MIN. BETWEEN STUD LAYERS
- 3-5/8" STEEL STUDS @ 16" oc W/ LATERAL BRACING
- 5/8" FIRECODE GYP.

STC EST. 60

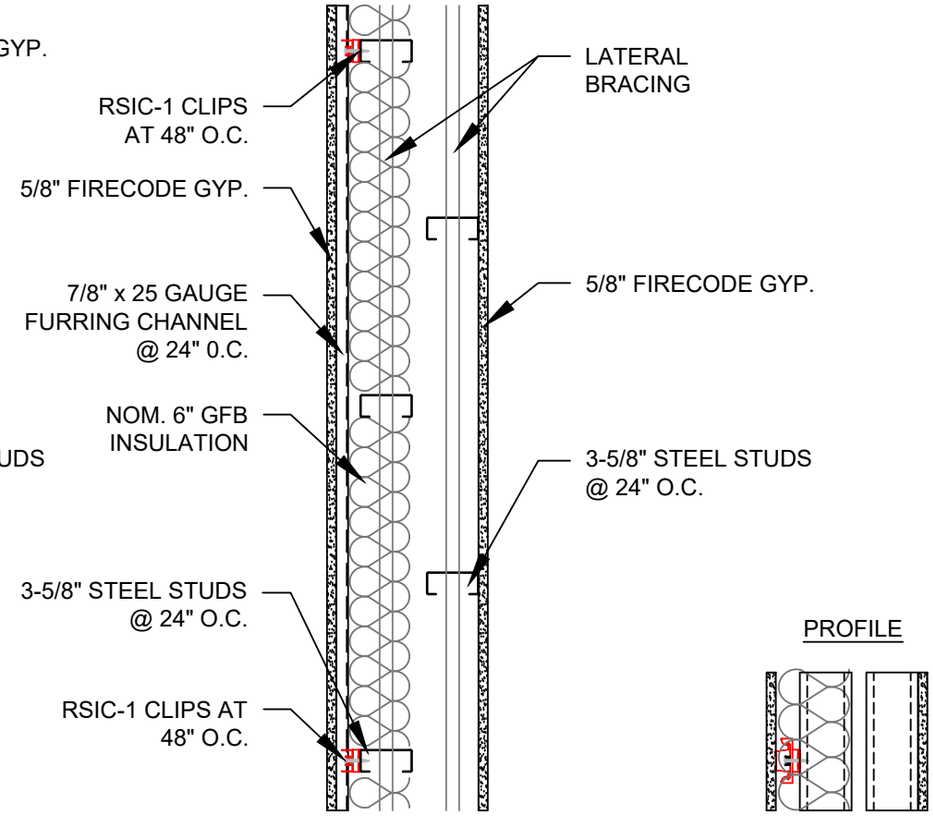

CONSTRUCTION

- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" 0.C.
- RSIC-1 CLIPS @ 24" x 48" oc
- NOM. 6" GFB INSULATION
- 3-5/8" STEEL STUDS @ 24" oc MAX. W/ LATERAL BRACING
- 1" GAP MIN. BETWEEN STUD LAYERS
- 3-5/8" STEEL STUDS @ 24" oc MAX. W/ LATERAL BRACING
- 5/8" FIRECODE GYP.

UL Fire Resistive Designs – 1 Hour - U493

PAC International, Inc. 866-774-2100 www.pac-intl.com

© 2007 PAC International, Inc. • All Rights Reserved. RSIC® is a registered Trademark of PAC International, Inc.