

***RSIC-SI-CRC EZ INSTALLATION GUIDE***

**RSIC-SI-CRC EZ SOUND ISOLATION**

**RSIC-SI-CRC EZ**






**SHIPPED FULLY  
ASSEMBLED  
AND CALIBRATED**

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

©PAC International, LLC. All Rights Reserved. • (866) 774-2100  
RSIC® is a registered Trade Mark of PAC International, LLC.

# RSIC-SI-CRC EZ SOUND ISOLATION CLIP



## Drywall Furring Channel:

- **Furring Channel:** 25 gauge hemmed edge, or 20 gauge standard. Meets or exceeds SSMA requirements.
- **Depth:** 7/8 inch
- **Width Bottom:** 2-9/16" to 2-11/16" inch wide nominal.
- **Width Top:** 1-1/4 inch wide

Splice drywall furring channel (hat track) with 6 inch overlap in mid span (between two clips) secure with 18 ga tie wire, or two 7/16" framing screws.

## Carrier Channel Options:

- **48" spacing 16 Gauge Cold Rolled Channel (CRC)**  
Dim: 1/2" x 1.5" x 1/2" SSMA code: 150U050-54
- CRC and Steel Studs must meet or exceed SSMA standards

## Fasteners:

- **RSIC-SI-CRC EZ to Wood:** #8 x 1-5/8 inch minimum size coarse thread screw. (Recommended #12 or #10 x 1-5/8 inch hex head)
- **RSIC-SI-CRC EZ to Steel:** # 8 x 1 inch minimum size fine thread screw. (Recommended #12 or #10 x 1 inch hex head)
- **1.5" x 16 Gauge Cold Rolled Channel (CRC) 1/2" x 1.5"**  
Use min 9/16" self drilling framing screws to fasten the 1.5" CRC channel RSIC-SI-CRC EZ
- CRC and Steel Studs must meet or exceed SSMA standards

**\*160 Lb**

**\*120 Lb**

**\*80 Lb**

**40 Lb**

**30 Lb**

**20 Lb**

**10 Lb**

**5 Lb**

## RSIC-SI-CRC EZ Spring Isolator




- **Maximum Spacing:** 48" oc. with Cold Rolled Channel
- **Finish elevation is 1/2" below preset height.**
- \*Black = 160 Lbs (HD/DD)
- \*Gold = 120 Lbs (HD/DD)
- \*Silver = 80 Lbs (HD/DD)
- Red = 40 Lbs
- Green = 30 Lbs
- Blue = 20 Lbs
- White = 10 Lbs
- Yellow = 5 Lbs

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

©PAC International, LLC. All Rights Reserved. • (866) 774-2100  
RSIC® is a registered Trade Mark of PAC International, LLC.

# RSIC-SI-CRC EZ 48" INSTALLATION

## Ceilings: RSIC-SI-CRC EZ clips installed 48" oc

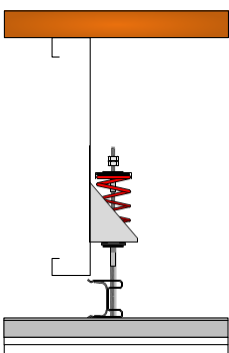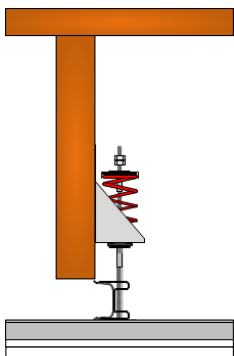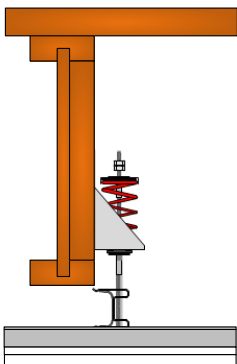


- Resilient Sound Isolation Clips (RSIC-SI-CRC EZ) shall be max 48 inches on center .
  - Layout the RSIC-SI-CRC EZ clips according to general guidelines represented in this installation manual.
  - Any additional or non standard room dimensions need to be addressed by a professional engineer.
  - Carefully remove RSIC-SI-CRC EZ pre-assembled, and pre-calibrated clips from packaging.
  - Be cautious to not rotate the RSIC-SI-CRC EZ clips separate from the Upper bracket. This may change the factory calibration of RSIC-SI-CRC EZ.
  - Verify the correct quantity of each RSIC-SI-CRC EZ isolator (weight / color) is included in the shipment.
  - Layout the RSIC-SI-CRC EZ clips out on the floor (reflecting the ceiling above) Ensure there are no additional items required to complete the installation, IE: Additional blocking to support the RSIC-SI-CRC EZ clips, or additional clips to support the drywall furring channel.
  - Fasten the Resilient Sound Isolation Clip (RSIC-SI-CRC EZ) to the structure with fasteners approved for a minimum pull-out and shear of 200 lbs. Allowing for 1/2" deflection after the gypsum board has been installed.
  - Using a laser level, or tape measure set the height for all of the RSIC-SI-CRC EZ brackets at the same height
  - At the perimeter, the distance between the wall and first support for the drywall shall be less than 8"
  - Snap the 16 Ga cold rolled channel to the RSIC-SI-CRC EZ clip. This is a temporary connection to speed up installation.
  - Screw the RSIC-SI-CRC EZ clip to the CRC channel with 2 1/2" min screws to make a permanent connection.
  - Wire tie the drywall furring channel to the cold rolled channel @ 24" oc or 16" oc. (24" oc for 1 or 2 layers of gyp board, 16" oc for 3 layers of gyp board)
  - Optional, Field Calibrate each isolator based on the weight they will be holding. Variances in the field may require additional adjustment to ensure a consistent system. (see field calibration guide on page 5)
- 
- Black 160 Lb field clips
  - Gold 12 Lb field clips
  - Silver 80 Lb field clips
  - Red 40 Lb field and perimeter clips
  - Green 30 Lb field and perimeter clips
  - Blue 20 Lb field, perimeter and edge clips
  - White 10 Lb edge, corner, and or infill clips
  - Yellow 5 edge or corner clips

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**


©PAC International, LLC. All Rights Reserved. • (866) 774-2100  
RSIC® is a registered Trade Mark of PAC International, LLC.

# RSIC-SI-CRC EZ SOUND ISOLATION CLIP

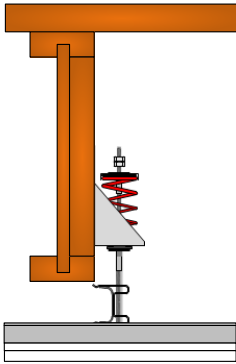


## Calibration and Adjustment:

- To field adjust the RSIC-SI-CRC EZ clip, rotate the Screw attaching the RSIC-SI-CRC EZ clip to the spring. Clockwise to raise. In converse rotate the screw counter clockwise to lower. Lowering the RSIC-1 clip will not loosen the spring. To adjust the spring itself you will need to hold the top Cup washer and turn the threaded rod from the top side.
- The Pre-Calibration of the RSIC-SI-CRC EZ clip is designed to deflect only 1/2" from its pre-loaded (pre-set) position after the 2nd layer gypsum board has been installed.

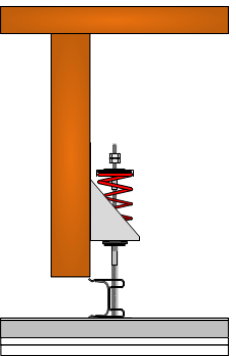

## Ceilings:

- IF required add strong back consisting of 1.5" Cold Rolled Channel or 2 pieces of drywall furring channel nested together, on the top side of the standard drywall furring channel to assist in leveling the ceiling at or near the perimeter. The strong back shall be placed perpendicular to the main drywall furring channels
- Install the gypsum board to the drywall furring channel leaving a 1/8" to 1/4" gap around the perimeter of the entire ceiling.
- Caulk around the entire perimeter of the ceiling wall intersection.
- Use fire and smoke rated acoustical sealant where required.
- The RSIC-SI-CRC EZ is engineered for use with a minimum of 2 layers of 5/8" gypsum board.
- \* RSIC OHD Adapter used for attaching directly to Concrete

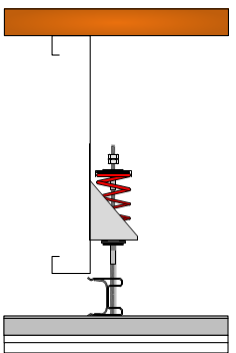

## General Information:

- Resilient Sound Isolation Clip Spring Isolator (RSIC-SI-CRC EZ), furring channel (hat track) and gypsum board shall not carry heavy loads such as Projectors, HVAC Ducting, Curtains, etc. For these items use additional RSIC isolation clips specifically designed for that purpose.
- Splice furring channel (hat track) with 6 inch overlap in mid span, secure with 18 ga. tie wire or with two framing screws (7/16")
- Seal all potential air leaks with non-hardening acoustical caulking to achieve best noise control results. Use fire rated sealant where required.
- When attaching the RSIC-SI-CRC EZ clips to a steel Joist the minimum allowable thickness is 20 ga. (0.030).

## Fire Test Information:

[WWW.PAC-INTL.COM](http://WWW.PAC-INTL.COM)

Check UL Fire Resistance Directory File # R16638


Check UL's web pages. [www.ul.com/database](http://www.ul.com/database)

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

©PAC International, LLC. All Rights Reserved. • (866) 774-2100  
RSIC® is a registered Trade Mark of PAC International, LLC.

# RSIC-SI-CRC EZ SOUND ISOLATION CLIP

## Sample layout 48" oc.

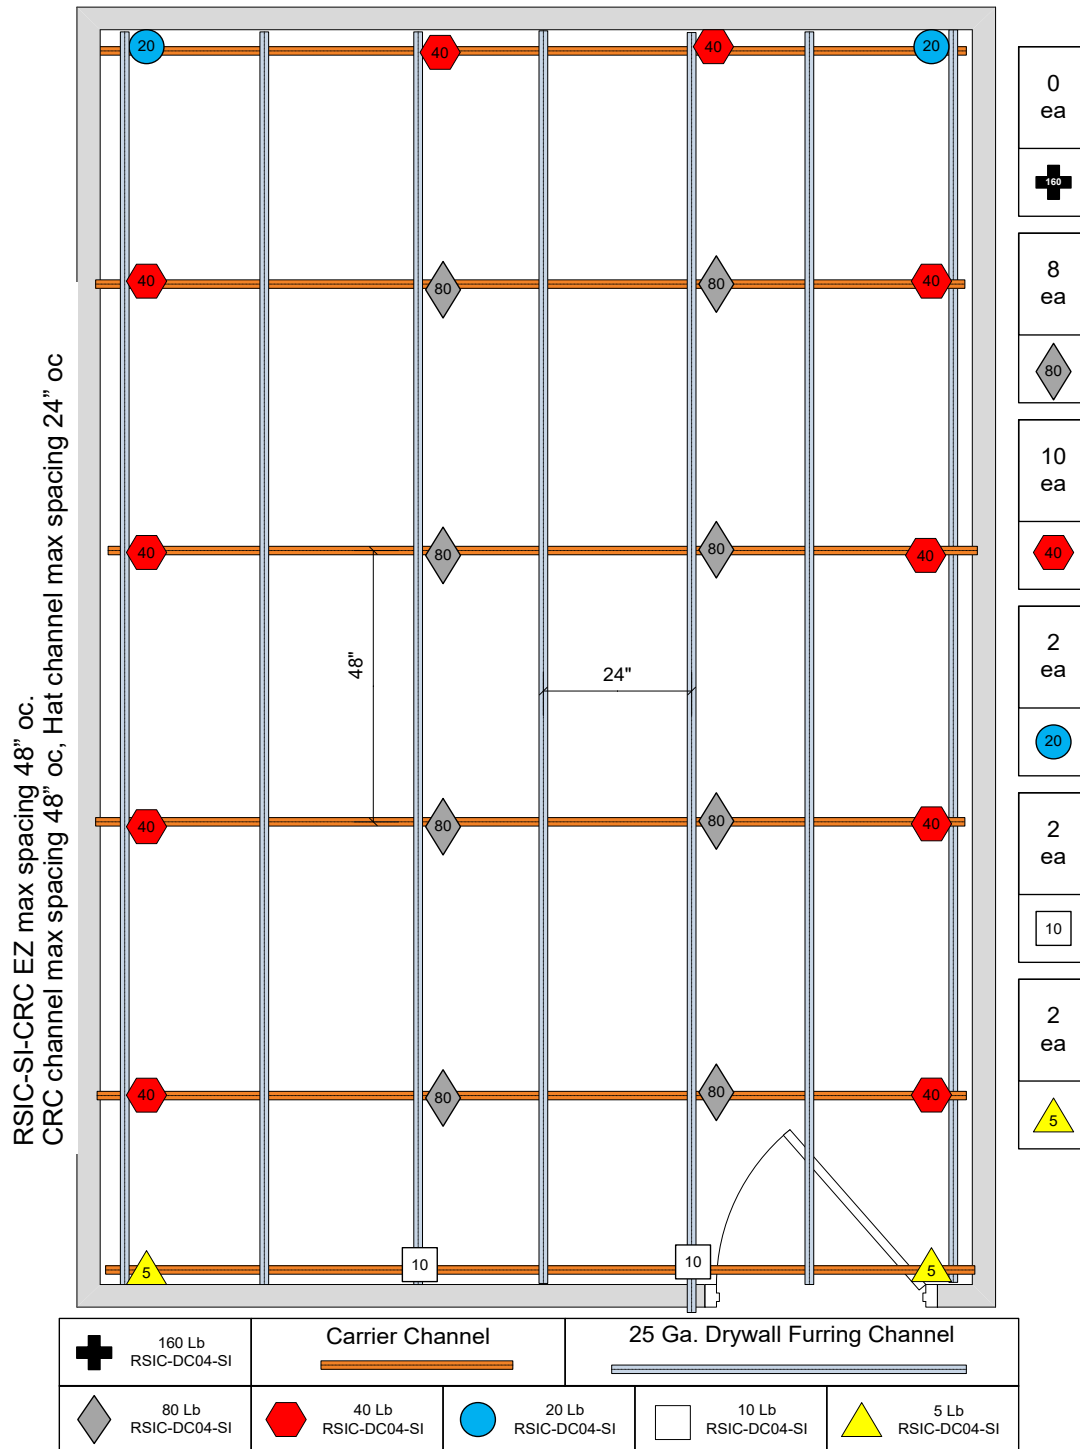

PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)

©PAC International, LLC. All Rights Reserved. • (866) 774-2100  
RSIC® is a registered Trade Mark of PAC International, LLC.

# RSIC-SI-CRC EZ SOUND ISOLATION



Members of the  
International Code Council

## **WARRANTY DISCLAIMER AND LIABILITY LIMITATION LANGUAGE**

### **NO EXPRESS OR IMPLIED WARRANTIES**

THERE IS NO WARRANTY, REPRESENTATION OR CONDITION OF ANY KIND; AND ANY WARRANTY, EXPRESS OR IMPLIED, IS EXCLUDED AND DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow limitations on implied warranties, so the above limitation may not apply to you.

### **LIABILITY LIMITED TO RETURN OF PURCHASE PRICE**

IT IS AGREED THAT SELLER'S LIABILITY AND PURCHASER'S SOLE REMEDY, WHETHER IN CONTRACT, UNDER ANY WARRANTY, IN TORT (INCLUDING NEGLIGENCE), IN STRICT LIABILITY OR OTHERWISE, SHALL NOT EXCEED THE RETURN OF THE AMOUNT OF THE PURCHASE PRICE PAID BY PURCHASER, AND UNDER NO CIRCUMSTANCES SHALL SELLER BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, PERSONAL INJURY, PROPERTY DAMAGE, DAMAGE TO OR LOSS OF EQUIPMENT, LOST PROFITS OR REVENUE, COSTS OF RENTING REPLACEMENTS AND OTHER ADDITIONAL EXPENSES, EVEN IF SELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE PRICE STATED FOR THE EQUIPMENT IS A CONSIDERATION IN LIMITING SELLER'S LIABILITY AND PURCHASER'S REMEDY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

### **SELLER NOT LIABLE FOR PURCHASER'S NEGLIGENCE**

SELLER WILL NOT BE LIABLE FOR ANY DAMAGES, LOSSES OR EXPENSES AS A RESULT OF PURCHASER'S NEGLIGENCE, WHETHER DEEMED ACTIVE OR PASSIVE AND WHETHER OR NOT ANY SUCH NEGLIGENCE IS THE SOLE CAUSE OF ANY SUCH DAMAGE, LOSS OR EXPENSE.

### **MODEL FOR DEMONSTRATION PURPOSES ONLY**

THE MODEL OR SAMPLE SHOWN BY SELLER TO BUYER IS USED FOR DEMONSTRATION PURPOSES ONLY. THERE IS NO WARRANTY THAT THE GOODS AS DELIVERED SHALL CONFORM TO THE MODEL OR SAMPLE, AND CONFORMITY OF THE GOODS TO THE MODEL OR SAMPLE IS NOT PART OF THE BASIS OF THE BARGAIN BETWEEN SELLER AND BUYER.

### **NO WARRANTY OR COMPLIANCE WITH SAFETY CODE OR REGULATION**

SELLER DOES NOT WARRANT THAT ANY OF THE GOODS SOLD WILL MEET OR COMPLY WITH THE REQUIREMENTS OF ANY SAFETY CODE, BUILDING OR DWELLING CODE, OR REGULATION OF ANY STATE, MUNICIPALITY OR OTHER JURISDICTION.

### **OREGON LAW APPLIES**

SELLER AND BUYER AGREE THAT ALL ASPECTS OF THIS TRANSACTION INCLUDING THE APPLICABLE STATUTE OF LIMITATIONS SHALL BE GOVERNED BY THE INTERNAL LAW OF THE STATE OF OREGON, AND NOT THE LAWS OF CONFLICTS. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

©PAC International, LLC. All Rights Reserved. • (866) 774-2100  
RSIC® is a registered Trade Mark of PAC International, LLC.