



### RSIC-SI-CRC EZ

The RSIC-SI-CRC EZ is designed to isolate the ceiling consisting of 1.5" x 16 Ga cold rolled channel and furring channel (25 or 20 Ga). The RSIC-SI-CRC EZ clip is available in 10 lb, 20 lb, 40 lb, 80 lb versions. Maximum spacing for the RSIC-SI-CRC is 48" x 48" oc. The RSIC-SI-CRC EZ clips unique universal mounting system allows it to be mounted to wood and steel framed systems. The RSIC-SI-CRC EZ isolator also has an all new install EZ option for faster installation.



Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

### RSIC-SI-CRC EZ specifications:

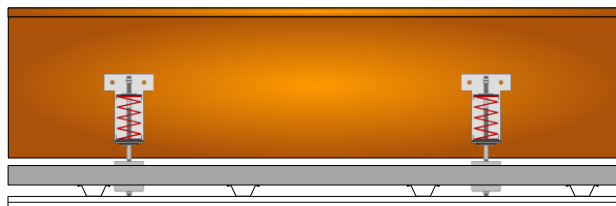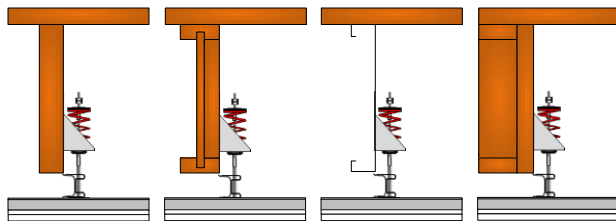

Acoustical design load:	5 lbs to 120 lbs
Total deflection	1 inch
Double deflection	YES (+/- 1/2")
Pre-Calibrated	YES
Pre-Assembled	YES
Adjustable	YES
Cavity min	1 inch (wood)
Cavity Max	9 inches
Adjustment limit	6 inches
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Retro Fit	YES
Tested, Engineered, Designed, and Calibrated In USA	