




RC-1 Boost


The **RC-1 Boost** is designed for use with any wood or steel application where noise control is required. This includes, wood framed or steel framed wall and ceiling systems. The RC-1 Boost product decouples the gypsum board from the structure, giving the assembly enhanced acoustical performance. With an Acoustical design load rating of 18 lbs per isolator, the RC-1 Boost clip can support up to two layers of 5/8" gypsum board when spaced no more that 16" x 24" oc. Final spacing [of the RC-Boost isolators is determined by the UL Fire Resistive Design specifications. The RC-1 Boost clip Wraps around the screw edge of standard RC channel. The RC-1 Boost is screwed to the framing using the PAC International supplied RC-1 Boost Screw. No substitutions allowed. The RC-Boost decouples the gypsum board from the structure stopping STC and IIC vibrations from entering the space adjacent.

RC-1 Boost screw specifically designed to enhance the acoustical performance of the RC-1 Boost isolator. No substitutions allowed.

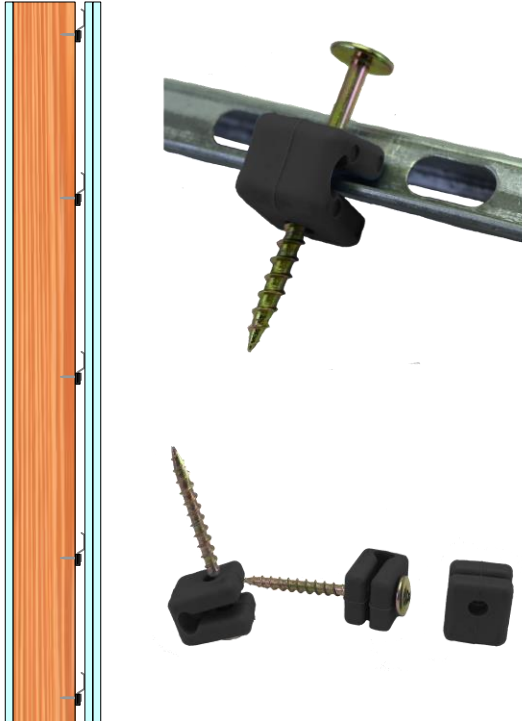

RC-1 Boost, A Low Cost, High Performance, Noise control Solution

Wood	Condo
Apartment	Recording Studio
Commercial	Home Theater
Conference Rooms	Commercial theater

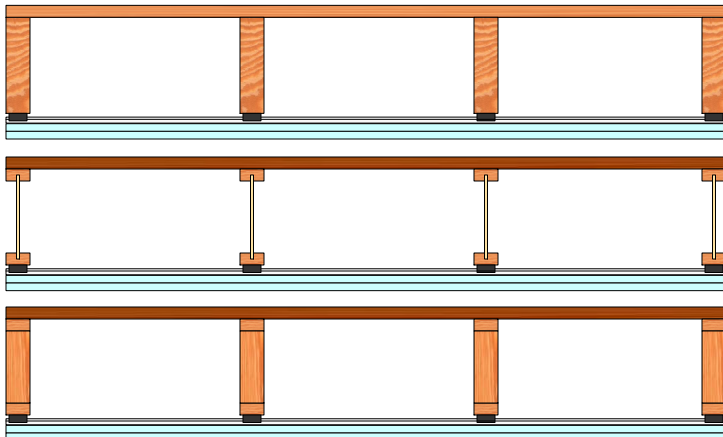

RC-1 Boost specifications:

Acoustical design load:	Up to 18 Lbs
Total deflection	2 mm
Double deflection	Yes (1 mm)
Low VOC	Yes
Adjustable	No
Cavity min	3/4"
Cavity Max	3/4"
Adjustment limit	N/A
Use on Ceilings	Yes
Use on walls	Yes
New Construction	Yes
Retro Fit	Yes
Assembled In USA	Yes

RC-1 Boost ACOUSTIC ASSEMBLY

FLOOR CEILING ASSEMBLY

DIRECT FIX TO SOLID WOOD JOIST

PAC International



World Leader in Noise Control Solutions



FC RC-1 BOOST NGC 7013168

Toll Free (866) 774-2100

WWW.PAC-INTL.COM

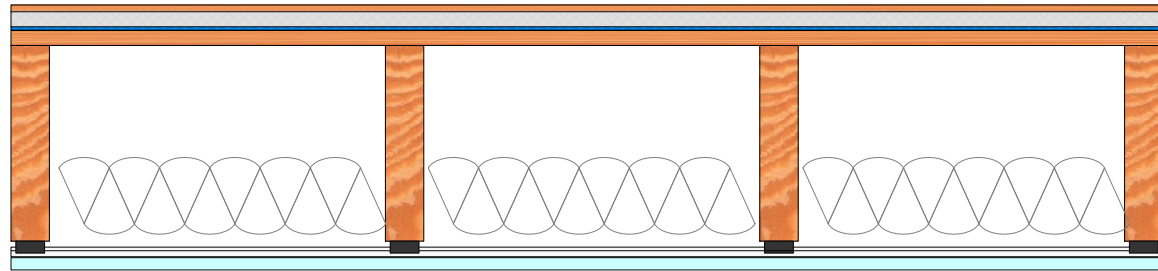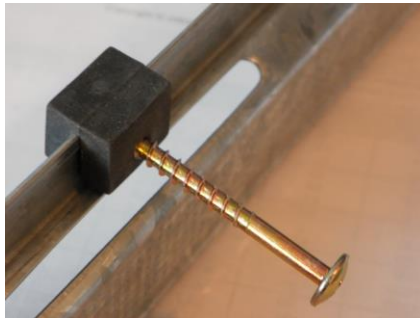

CONSTRUCTION

- WOOD LAMINATE FLOORING
- 1/2" WOOD UNDERLAYMENT
- 1" HACKER FIRM-FILL GYPCRETE
- 1 LAYER HACKER SCM-250 UNDERLAYMENT
- 5/8" T&G PLYWOOD SUBFLOOR
- 2" X 10" SOLID WOOD JOIST @ 16" OC
- R-11 FIBERGLASS BATT INSULATION (NOM 6")
- RC-1 BOOST INSTALLED @ 16" x 24" OC
- RC-CHANNEL @ 24" OC
- 1 LAYER 5/8" PABCO FLAME CURB TYPE "C" WALLBOARD

<p>STC 58</p>	<p>IIC 50</p>

NGC-7013168/NGC-5013114

©2016 PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trade Mark of PAC International, LLC.